



BREAKTHRU™ PUMP OPEN BARRIER DEVICE

This product may be covered by one or more patents or pending patent applications.

OPTIMIZE YOUR TUBING INSTALLATION, MINIMIZE YOUR COSTS

Nine's BreakThru™ Pump Open Barrier Device is a bi-directional plug that allows operators to reach TD, set their production packer, and test their tubing in a cost effective way. The BreakThru BPO is standard approved according to ISO 14310V6 and ISO14998V6, V0 testing on request. The plug is run in hole as part of the tubing string in a closed position. Once tubing is at TD and the tubing and well operations no longer require a well barrier, the plug can be pumped open remotely from surface by applying pressure to a preset differential pressure. Once the preset differential pressure is reached, the plug will activate and the glass barrier will shatter into fine sand like particles, leaving a full bore ID. The activation differential pressure needs to be preset prior to RIH and can be set in 500 psi increments.

HOW DOES THE PLUG HANDLE HARSH DOWNHOLE ENVIRONMENTS?

The device is manufactured to perform. It is made from high-quality, ultra-durable engineered material, which can withstand extreme downhole temperatures and loads. Once the string is landed, pressure up to the activation pressure and the plug disintegrates, leaving a full bore ID.

Features and Benefits

- Proven barrier
- Highly engineered barrier
- Efficient and easy removal by surface pressure
- Full tubing ID
- Can be run as tubing test barrier, packer setting device, and well barrier
- Proven track record with over 1,000+ U.S. land installations, 99.97% successful installations
- Low cost solution


99.97% OF BREAKTHRU™
PLUGS LANDED IN
FIRST ATTEMPT

Allowing operators to reach TD and set their production packer and test their tubing in a cost effective way.

BREAKTHRU™ PUMP OPEN BARRIER DEVICE CASING SPECS					
Description inch (mm)	O.D. inch (mm)	Machine I.D. inch (mm)	Overall Length inch (mm)	ISO Differential Pressure Rating 125 ksi (MPa)	Maximum Reliable Temperature
2.875 BT (73.0)	3.79 (96.3)	2.44 (62.0)	28.0 (711.0)	10,000 (69.0)	320°F (160°C)
3.5 BT (88.9)	4.80 (121.9)	2.91 (74.0)	28.0 (711.0)	10,000 (69.0)	
4.5 BT (114.3)	5.44 (138.2)	3.88 (98.5)	28.0 (711.0)	7,500 (51.7)	
4.5 BT (114.3)	5.75 (146.1)	3.92 (99.6)	28.0 (711.0)	7,500 (51.7)	
5.5 BT (139.7) Slim-Line	6.50 (165.1)	4.78 (121.4)	28.0 (711.0)	7,500 (51.7)	
5.5 BT (139.7)	7.09 (180.0)	4.78 (121.4)	28.0 (711.0)	7,500 (51.7)	
6.625 BT / 7 BT (168.3 / 177.8)	8.13 (206.5)	5.88 (149.35)	28.0 (711.0)	5,000 (34.5)	

Other sizes and higher pressure/temperature ratings may be available upon request.

Casing Specs are according to API Tubing/Casing Dimension Chart Information.

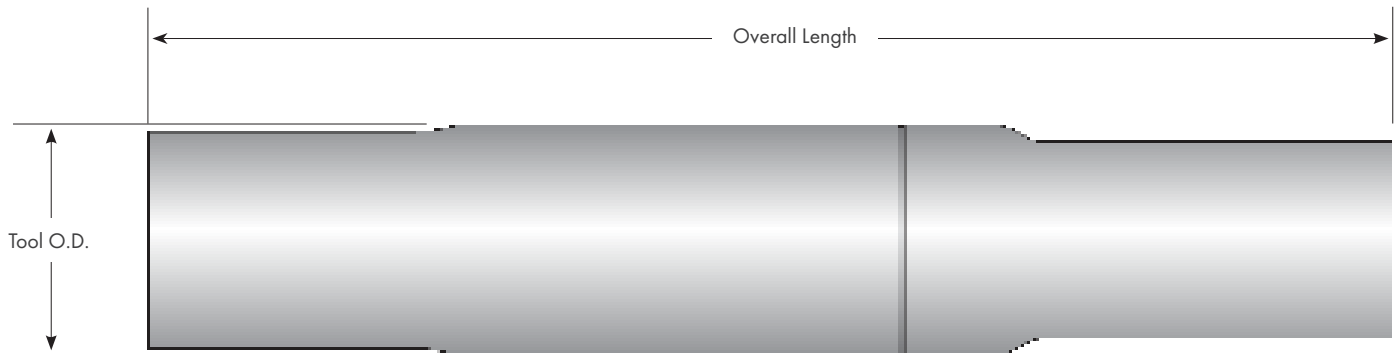

For more information, and to find a representative near you, visit nineenergyservice.com