MAGNUM FASTBALL™ DM

This product may be covered by one or more patents or pending patent applications.

INNOVATION REVEALED

Your days of fetching frac balls are over. The Magnum Fastball™ DM is made of a dissolvable metal and disappears on its own in a matter of days. The Magnum Fastball™ DM has incredible compressive strength properties and dissolves at predictable rates. No well interventions. No delays in schedule. It's just one more way Nine Energy Service enables operators to achieve greater efficiency. Which means you'll save time, money and find a new way to work smarter in your completions.
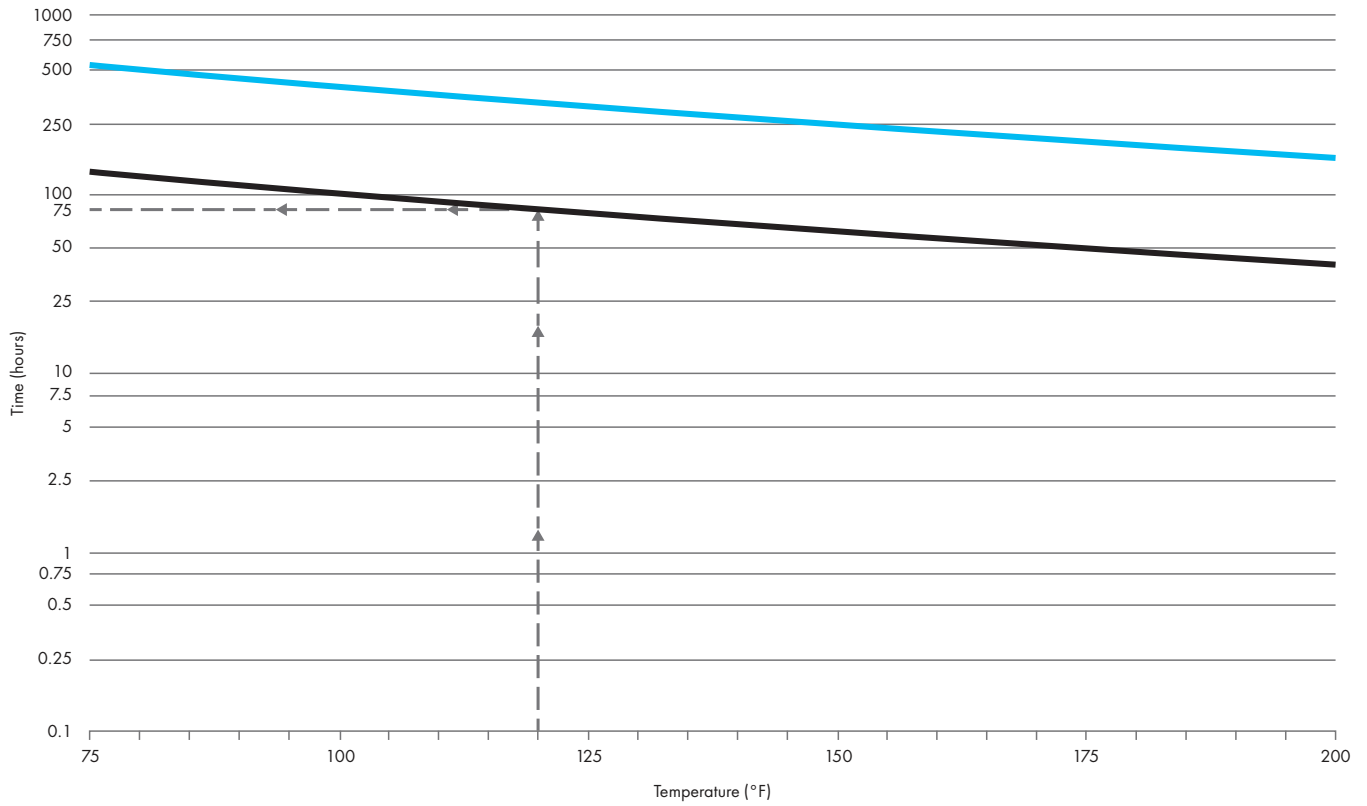
CORROSION RATE

Corrosion rate in low chloride solutions: The Magnum Fastball™ DM is designed to quickly corrode in chloride solutions. The chart on page 2 shows the corrosion rate at chloride levels from pure water to 3% and above. We see that in above 1% solutions, the corrosion rate is nominally the same as 3 to 15% solutions. The corrosion rate is certainly active at 0.5% and at 0.25% it is stilling running at a 200 mg/sqcm/day rate. This test was done at 100F and would apply as long as there was any chloride present (sodium chloride, calcium chloride, etc).

Comparison against other alloys: In testing other metals for corrosion rate in chloride containing solutions, we have found that the Magnum Fastball™ DM has a corrosion rate that is between 100 and 10,000 times higher than balls made of other conventional metals.

Features

- Ball sizes from 1.60" to 4.50" available
- 1.83 specific gravity
- Field tested at a pump rate of 20 bbls/min
- Environmentally safe
- Sizes readily available
- Custom sizes available upon request
- Tight tolerances held + 0.000/ - 0.005"
- High compressive strength capabilities 10,000 psi+
- Magnum Fastball™ DM won't stick on seat
- Patent Pending Technology

10,000 PSI+

YOUR DAYS OF FETCHING FRAC BALLS ARE OVER WITH FASTBALL™

You'll save time, money and find a new way to work smarter in your completions.

NO WELL INTERVENTIONS

NO DELAYS IN SCHEDULE

ACHIEVE GREATER EFFICIENCY

Magnum Fastball™ 1.75" O.D. Ball vs Time at 120°F

Fastball FW DM Corrosion (hrs) — Fastball DM Corrosion (hrs)

Example: 1.75" O.D. Magnum Fresh-Water Fastball™
Temperature = 120°F
Fastball™ Degredation = 82.1 Hours

For more information, and to find a representative near you, visit nineenergyservice.com